

Цифровые инкубаторы, мини-инкубаторы, инкубаторы охлаждающие, принадлежности

Виды принадлежностей: комплекты для штабелирования, полки, гибридизационные трубки, регуляторы.

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: cen@nt-rt.ru || сайт: <http://coleparmer.nt-rt.ru/>

Cole-Parmer Chilling Incubator; 1 cu ft, 230 VAC, 50/60 Hz



Cole-Parmer Chilling Incubator; 1 cu ft, 230 VAC, 50/60 Hz

Cole-Parmer – Item # EW-39050-25

Specifications & Description

- Capacity (cu ft) 1
- Capacity (Liters) 28.3
- Control Type Digital
- Max Temperature (° C) 70
- Min Temperature (° C) 4
- Temperature Resolution 0.1°C

- Overall Depth (in) 18 1/2
- Overall Depth (cm) 47
- Overall Height (in) 15 1/2
- Overall Height (cm) 39.4
- Overall Width (in) 22 1/4
- Overall Width (cm) 56.5
- Power (VAC) 230
- Power (Hz) 50/60
- Power (watts) 300
- Number Of Chambers 1
- Chamber Depth (in) 10
- Chamber Depth (cm) 25.4
- Chamber Height (in) 12
- Chamber Height (cm) 30.5
- Chamber Width (in) 14
- Chamber Width (cm) 35.6
- Display Type Digital
- Number Of Shelves 2
- Number Of Shelf Positions 4
- Internal Construction ABS plastic
- Description Chilling Incubator; 1 cu ft, 230 VAC, 50/60 Hz
- Warranty 3 Years



KEY FEATURES

- Peltier-based element heats and chills with precise control even at ambient—ideal for forced degradation of antibiotics, protein crystal growth, and applications that require ambient temperature control
- Use the built-in RS-232 to connect to a 286 or better computer
- Clear plastic inner door allows you to view your samples while maintaining chamber environment
- Programmable digital display
- Timer with audible alarm and auto-off up to 99 hr, 99 min
- 3 year Warranty

Cole-Parmer Low-Cost Digital Incubator, 0.7 cubic ft, Acrylic Door, 115 VAC



Versatile and dependable—ideal for educational, or industrial labs

- Maintain temperatures with $\pm 0.5^{\circ}\text{C}$ stability*
- Heating element comes with 3-year Warranty —each incubator is individually tested
- 3 year Warranty

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Control Type Digital
- Max Temperature ($^{\circ}\text{C}$) 62
- Temperature Resolution 1.0 or 0.1°C
- Temperature Stability $\pm 0.75^{\circ}\text{C}$
- Overall Depth (in) 11
- Overall Depth (cm) 27.9

- Overall Height (in) 15
- Overall Height (cm) 27.94
- Overall Width (in) 13
- Overall Width (cm) 33
- Power (VAC) 120
- Power (Hz) 50/60
- Power (watts) 120
- Number Of Chambers1
- Chamber Depth (in) 10
- Chamber Depth (cm) 25.4
- Chamber Height (in) 10
- Chamber Height (cm) 25.4
- Chamber Width (in) 12
- Chamber Width (cm) 30.5
- Display Type Digital
- Number Of Shelves 1
- Number Of Shelf Positions 7
- Internal ConstructionAluminum
- Description Low-Cost Digital Incubator, 0.7 cubic ft, Acrylic Door, 115 VAC
- Warranty 3 Years



MORE ABOUT THIS ITEM

Digital incubator is microprocessor controlled and includes a unique temperature tracking feature which stores maximum process temperature deviation from set point in 0.1 degree units. Self-diagnostic function alerts if control software malfunctions or thermocouple fails. The LED displays temperature in $^{\circ}\text{C}$ or $^{\circ}\text{F}$.

*Measured at 35°C under controlled laboratory conditions.

Cole-Parmer® INC-250 Series Mini CO2 Digital Incubator



• **COLE-PARMER**

Space-saving footprint—ideal for use inside biological safety cabinets

- Dual-beam infrared sensor continuously monitors CO₂ levels
- Large LED display indicate real-time temperature and CO₂ percentage
- Large 20-L internal chamber accepts bottles and flasks up to 2 L
- Audible and visual alarms trigger when CO₂ levels drop

The mini digital temperature and CO₂ control incubators are only 13 inches wide, small enough to fit in most biological safety cabinets, conserving valuable bench space. A thick layer of high-efficiency insulation and a 12 VDC car adapter make this incubator ideal for transporting cells. The unit can maintain set temperature levels within 10% for up to one hour after power has been disconnected. Intuitive control panel and large LED displays allow you to digitally adjust both temperature and CO₂ percentages and view in real time. Another function on the panel provides simple in-lab calibration of temperature or CO₂. You can add up to 80% humidity to the chamber by inserting a stainless steel reservoir.

item	Capacity (Liters)	Max Temperature (°C)	Power (VAC)
 EW-03608-05	20	55	115

item	Capacity (Liters)	Max Temperature (° C)	Power (VAC)
 EW-03608-06	20	55	230

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Sensor Type Dual Beam IR
- Max Temperature (° C) 55
- Min Temperature (° C) -10
- Temperature Accuracy±0.25°C
- Temperature Uniformity±0.25°C at 37°C
- Min Humidity (%) 70
- Max Humidity (%) 80
- Overall Depth (in) 18 3/4
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/4
- Overall Width (cm) 33.5
- Power (VAC) 115
- Power (Hz) 50/60
- Chamber Depth (in) 12 7/8
- Chamber Depth (cm) 32.5
- Chamber Height (in) 9 1/4
- Chamber Height (cm) 23.5
- Chamber Width (in) 10 1/4
- Chamber Width (cm) 26
- Number Of Shelves 2
- Number Of Shelf Positions 2
- AlarmYes
- Description Mini CO2 Digital Incubator; 115 V
- Warranty 3 Years

Cole-Parmer® INC-200 Series Mini Digital Incubators



Eliminate the need for external thermometers

- Large internal chamber accepts bottles and flasks up to 2 L
- Built-in internal outlet powers small shakers and rockers
- See-through panel lets you view entire chamber without opening door

These compact incubators with digital temperature control eliminate the need for external thermometers and repetitive “fine tuning” of an analog controller. The incubators immediately begin to heat up or cool down (depending on the model) as soon as the desired temperature is set. The chamber temperature is continuously monitored, and the real-time temperature can be easily viewed on the large LED display

item	Capacity (cu ft)	Power (VAC)	Description
 EW-03608-00	0.7	115	Mini Digital Incubator, Heat Only, 115 V
 EW-03608-01	0.7	115	Mini Digital Incubator, Heat and Cool, 115 V

item	Capacity (cu ft)	Power (VAC)	Description
 EW-03608-02	0.7	230	Mini Digital Incubator, Heat and Cool, 230 V
 EW-03608-03	0.7	230	Mini Digital Incubator, Heat Only, 230 V

Cole-Parmer H2200-H Mini Digital Incubator, Heat Only, 115 V

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Max Temperature (° C) 60
- Min Temperature (° C) 20
- Temperature Accuracy 0.5°C
- Temperature Uniformity ±1.5°C
- Overall Depth (in) 18 45/64
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/5
- Overall Width (cm) 33.5
- Power (VAC) 115
- Power (Hz) 50/60
- Chamber Depth (in) 12 51/64
- Chamber Depth (cm) 32.5
- Chamber Height (in) 9 19/64
- Chamber Height (cm) 23.5
- Chamber Width (in) 10 19/64
- Chamber Width (cm) 26
- Display Type LED
- Number Of Shelves 2
- Number Of Shelf Positions 2

- Description Mini Digital Incubator, Heat Only, 115 V
- Warranty 3 Years

Cole-Parmer H2200-H-C Mini Digital Incubator, Heat and Cool, 115 V

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Max Temperature (° C) 60
- Min Temperature (° C) 15
- Temperature Accuracy0.5°C
- Temperature Uniformity±1.5°C
- Overall Depth (in) 18 45/64
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/5
- Overall Width (cm) 33.5
- Power (VAC) 115
- Power (Hz) 50/60
- Chamber Depth (in) 12 51/64
- Chamber Depth (cm) 32.5
- Chamber Height (in) 9 19/64
- Chamber Height (cm) 23.5
- Chamber Width (in) 10 19/64
- Chamber Width (cm) 26
- Display Type LED
- Number Of Shelves 2
- Number Of Shelf Positions 2
- Description Mini Digital Incubator, Heat and Cool, 115 V
- Warranty 3 Years

Cole-Parmer H2200-H-C-E Mini Digital Incubator, Heat and Cool, 230 V

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Max Temperature (° C) 60
- Min Temperature (° C) 15
- Temperature Accuracy0.5°C
- Temperature Uniformity±1.5°C
- Overall Depth (in) 18 45/64
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/5
- Overall Width (cm) 33.5
- Power (VAC) 230
- Power (Hz) 50/60

• Chamber Depth (in) 12 51/64
• Chamber Depth (cm) 32.5
• Chamber Height (in) 9 19/64
• Chamber Height (cm) 23.5
• Chamber Width (in) 10 19/64
• Chamber Width (cm) 26
• Display Type LED
• Number Of Shelves 2
• Number Of Shelf Positions 2
• Description Mini Digital Incubator, Heat and Cool, 230 V
• Warranty 3 Years

Cole-Parmer H2200-H-E Mini Digital Incubator, Heat Only, 230 V

Cole-Parmer – Item # EW-03608-03

Specifications & Description

• Capacity (cu ft) 0.7
• Capacity (Liters) 20
• Max Temperature (° C) 60
• Min Temperature (° C) 20
• Temperature Accuracy0.5°C
• Temperature Uniformity±1.5°C
• Overall Depth (in) 18 45/64
• Overall Depth (cm) 47.5
• Overall Height (in) 14 1/2
• Overall Height (cm) 37
• Overall Width (in) 13 1/5
• Overall Width (cm) 33.5
• Power (VAC) 230
• Power (Hz) 50/60
• Chamber Depth (in) 12 51/64
• Chamber Depth (cm) 32.5
• Chamber Height (in) 9 19/64
• Chamber Height (cm) 23.5
• Chamber Width (in) 10 19/64
• Chamber Width (cm) 26
• Display Type LED
• Number Of Shelves 2
• Number Of Shelf Positions 2
• Description Mini Digital Incubator, Heat Only, 230 V
• Warranty 3 Years

Cole-Parmer 0.1 Cubic Foot Mini Incubator - 230VAC 50/60HZ



Cole-Parmer – Item # EW-03608-15

- Holds up to 14 microwell plates or 54 test tubes
- Stack units to increase capacity without using more bench space
- Heating element lies in the back-eliminating the risk of scorching the sample when placed on the chamber floor
- 3 year Warranty

Specifications & Description

- Overall Depth (cm) 16.5
- Overall Height (in) 6 3/16
- Overall Height (cm) 15.7
- Overall Width (in) 7 11/16
- Overall Width (cm) 19.5
- Power (VAC) 230
- Power (Hz) 50/60
- Number Of Chambers1
- Chamber Depth (in) 5 3/4
- Chamber Depth (cm) 14.6
- Chamber Height (in) 5 1/4
- Chamber Height (cm) 13.3
- Chamber Width (in) 7 1/4
- Chamber Width (cm) 18.4
- Display Type Analog
- Internal ConstructionAluminum
- Description 0.1 Cubic Foot Mini Incubator - 230VAC 50/60HZ
- Warranty 3 Years

- Capacity (cu ft) 0.1
- Capacity (Liters) 2.8
- Control Type Analog
- Max Temperature (° C) 42
- Overall Depth (in) 6 1/2

Cole-Parmer® INC-200 Series Mini Digital Incubators



Eliminate the need for external thermometers

- Large internal chamber accepts bottles and flasks up to 2 L
 - Built-in internal outlet powers small shakers and rockers
 - See-through panel lets you view entire chamber without opening door
- These compact incubators with digital temperature control eliminate the need for external thermometers and repetitive “fine tuning” of an analog controller. The incubators immediately begin to heat up or cool down (depending on the model) as soon as the desired temperature is set. The chamber temperature is continuously monitored, and the real-time temperature can be easily viewed on the large LED display

item	Capacity (cu ft)	Power (VAC)	Description
EW-03608-00	0.7	115	Mini Digital Incubator, Heat Only, 115 V

item	Capacity (cu ft)	Power (VAC)	Description
 EW-03608-01	0.7	115	Mini Digital Incubator, Heat and Cool, 115 V
 EW-03608-02	0.7	230	Mini Digital Incubator, Heat and Cool, 230 V
 EW-03608-03	0.7	230	Mini Digital Incubator, Heat Only, 230 V

Cole-Parmer H2200-H Mini Digital Incubator, Heat Only, 115 V

Cole-Parmer – Item # EW-03608-00

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Max Temperature (° C) 60
- Min Temperature (° C) 20
- Temperature Accuracy 0.5°C
- Temperature Uniformity ±1.5°C
- Overall Depth (in) 18 45/64
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/5
- Overall Width (cm) 33.5
- Power (VAC) 115
- Power (Hz) 50/60
- Chamber Depth (in) 12 51/64
- Chamber Depth (cm) 32.5
- Chamber Height (in) 9 19/64
- Chamber Height (cm) 23.5
- Chamber Width (in) 10 19/64
- Chamber Width (cm) 26
- Display Type LED
- Number Of Shelves 2
- Number Of Shelf Positions 2
- Description Mini Digital Incubator, Heat Only, 115 V
- Warranty 3 Years

Cole-Parmer H2200-H-C Mini Digital Incubator, Heat and Cool, 115 V

Cole-Parmer – Item # EW-03608-0

Specifications & Description

- Capacity (cu ft) 0.7
- Capacity (Liters) 20
- Max Temperature (° C) 60
- Min Temperature (° C) 15
- Temperature Accuracy 0.5°C
- Temperature Uniformity ±1.5°C
- Overall Depth (in) 18 45/64
- Overall Depth (cm) 47.5
- Overall Height (in) 14 1/2
- Overall Height (cm) 37
- Overall Width (in) 13 1/5
- Overall Width (cm) 33.5
- Power (VAC) 115
- Power (Hz) 50/60
- Chamber Depth (in) 12 51/64
- Chamber Depth (cm) 32.5
- Chamber Height (in) 9 19/64
- Chamber Height (cm) 23.5

• Chamber Width (in) 10 19/64
• Chamber Width (cm) 26
• Display Type LED
• Number Of Shelves 2
• Number Of Shelf Positions 2
• Description Mini Digital Incubator, Heat and Cool, 115 V
• Warranty 3 Years

Cole-Parmer H2200-H-C-E Mini Digital Incubator, Heat and Cool, 230 V

Cole-Parmer – Item # EW-03608-02

Specifications & Description

• Capacity (cu ft) 0.7
• Capacity (Liters) 20
• Max Temperature (° C) 60
• Min Temperature (° C) 15
• Temperature Accuracy0.5°C
• Temperature Uniformity±1.5°C
• Overall Depth (in) 18 45/64
• Overall Depth (cm) 47.5
• Overall Height (in) 14 1/2
• Overall Height (cm) 37
• Overall Width (in) 13 1/5
• Overall Width (cm) 33.5
• Power (VAC) 230
• Power (Hz) 50/60
• Chamber Depth (in) 12 51/64
• Chamber Depth (cm) 32.5
• Chamber Height (in) 9 19/64
• Chamber Height (cm) 23.5
• Chamber Width (in) 10 19/64
• Chamber Width (cm) 26
• Display Type LED
• Number Of Shelves 2
• Number Of Shelf Positions 2
• Description Mini Digital Incubator, Heat and Cool, 230 V
• Warranty 3 Years

Cole-Parmer H2200-H-E Mini Digital Incubator, Heat Only, 230 V

Cole-Parmer – Item # EW-03608-03

Specifications & Description

• Capacity (cu ft) 0.7
• Capacity (Liters) 20
• Max Temperature (° C) 60
• Min Temperature (° C) 20
• Temperature Accuracy0.5°C
• Temperature Uniformity±1.5°C
• Overall Depth (in) 18 45/64
• Overall Depth (cm) 47.5
• Overall Height (in) 14 1/2
• Overall Height (cm) 37
• Overall Width (in) 13 1/5
• Overall Width (cm) 33.5
• Power (VAC) 230
• Power (Hz) 50/60

• Chamber Depth (in) 12 51/64
• Chamber Depth (cm) 32.5
• Chamber Height (in) 9 19/64
• Chamber Height (cm) 23.5
• Chamber Width (in) 10 19/64
• Chamber Width (cm) 26
• Display Type LED
• Number Of Shelves 2
• Number Of Shelf Positions 2
• Description Mini Digital Incubator, Heat Only, 230 V
• Warranty 3 Years

Cole-Parmer® Accessories for Cole-Parmer® INC-200 Series Clear Incubators

Optimize performance of your incubator system

Compatible for use with Cole-Parmer® clear incubators. Incubator sold separately.



item	Description
 EW-01110-97	Base Plate for Clear Incubators
 EW-01110-98	Shelf Rack System for Clear Incubators

item	Description
 EW-01110-99	Sample Tray for Clear Incubators

Cole-Parmer® Accessories for Cole-Parmer® HI-200 Series Hybridization Incubators



Complement your hybridization incubation systems


Expand the capabilities of your Cole Parmer HI-200 Series Hybridization Incubators with our collection of optional accessories. This collection includes a selection of rocking platforms, hybridization tubes of various sizes, and tube holders with clips.

item	Compatible With	Description
 EW-39455-10	Hybridization incubators 39455-01, 39455-02, and 39455-03	Hybridization Tube for HI-200D Hybridization Incubators, 80 mm, No Caps

item	Compatible With	Description
 EW-39455-11	Hybridization incubators 39455-01, 39455-02, and 39455-03	Hybridization Tube for HI-200D Hybridization Incubators, 80 mm, with Caps
 EW-39455-12	Hybridization incubators 39455-04, 39455-06, 39455- 07, and 39455-08	Hybridization Tube for HI-200 Hybridization Incubators, 80 mm, No Caps
 EW-39455-13	Hybridization incubators 39455-04, 39455-06, 39455- 07, and 39455-08	Hybridization Tube for HI-200 Hybridization Incubators, 80 mm, with Caps
 EW-39455-14	Hybridization incubators 39455-01, 39455-02, and 39455-03	Hybridization Tube for HI-200D Hybridization Incubators, 44 mm, with Caps

item	Compatible With	Description
 EW-39455-15	Hybridization incubators 39455-04, 39455-06, 39455-07, and 39455-08	Hybridization Tube for HI-200 Hybridization Incubators, 44 mm, with Caps
 EW-39455-19	Hybridization incubators 39455-04, 39455-06, 39455-07, and 39455-08	Stacking Kit for HI-200 Hybridization Incubators, 3 Units
 EW-39455-21	Hybridization incubators 39455-04, 39455-06, 39455-07, and 39455-08	Stacking Kit for HI-200 Hybridization Incubators, 2 Units
 EW-39455-22	Hybridization incubators 39455-04, 39455-06, 39455-07, and 39455-08	Shelf for HI-200 Hybridization Incubators, Stainless Steel Mesh

Cole-Parmer® INC-400 Series Gravity and Mechanical Incubator Accessories

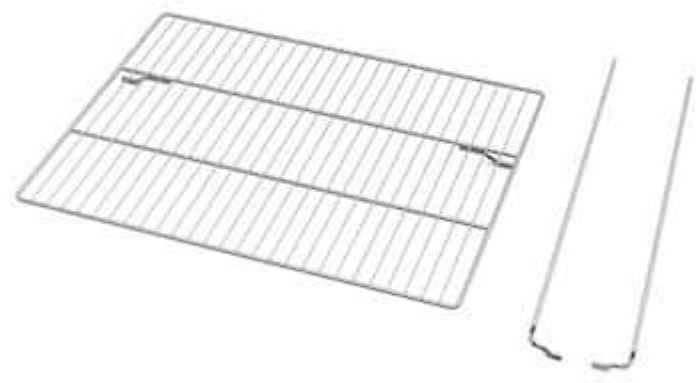

Shelves for gravity and mechanical convection incubators

- Increase space in your incubator with extra shelving
For use with the Cole-Parmer® 52411-XX series of incubators.

\$

item	Compatible With
 EW-52411-80	52411-66 and 52411-67
 EW-52411-81	52411-68 and 52411-69

item	Compatible With
 EW-52411-82	52411-70 and 52411-71
 EW-52411-83	52411-72 and 52411-73
 EW-52411-84	52411-74 and 52411-75
 EW-52411-85	52411-76 and 52411-77

item	Compatible With
 EW-52411-86	52411-78 and 52411-79
 EW-52411-87	52411-56 and 52411-57
 EW-52411-88	52411-58 and 52411-59
 EW-52411-89	52411-60 and 52411-61

item	Compatible With
 EW-52411-90	52411-62 and 52411-63
 EW-52411-91	52411-64 and 52411-65

Cole-Parmer® Mini Digital Incubator Accessories



Optimize performance of your mini digital incubator

Choose from a wide range of accessories including a CO2 regulator and additional shelved for your mini digital incubator.

item	Description
 EW-03608-04	Extra Shelf for Mini Digital Incubator; 10.5" x 8"
 EW-03608-07	CGA 320 CO2 Regulator for Mini Incubator



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: cen@nt-rt.ru || сайт: <http://coleparmer.nt-rt.ru/>